

TF5545

ROOF TENT

DISCLAIMER

This product should be fitted by a competent mechanic with appropriate tools and safety equipment. Terrafirma accepts no liability for damage or injury resulting from improper installation or misuse of this product. Always follow vehicle manufacturer guidelines when carrying out modifications or repairs.

WARNING

Keep all flame and heat sources away from the Roof Top Tent.

Avoid using this Roof Top Tent in extreme weather conditions.


CONTENTS

No.	Item Name	Quantity
1	Ladder Receiver	2
2	Lock	4
3	Ring for Shoe Bag	2
4	U-Shaped Slider	8
5	Shoe Bag & S Buckle	1
6	Handle	1
7	M8*50mm Screws & Nuts	8
8	M8*16mm Screws & Nuts	6
9	Bottom Mounting Sheet Metal	4
10	M8*12mm Screws & Nuts	16
11	Slider	16
12	Hexagon Wrench	2
13	Ratchet Wrench	1
14	LED Cable	1

Ensure that you follow the installation instructions carefully. It is very important that your Roof Top Tent is installed correctly on your vehicle and you fully understand the safe use of your Roof Top Tent.

Please refer to your vehicle manufacturer or vehicle manual for roof load carrying capacity and also the manufacturer of your roof rack/rails for carrying capacities, particularly if you are planning to travel off-road.

Not all vehicles or aftermarket roof rack/bars are suitable for carrying a Roof Top Tent, this may include; weight restrictions and or adhering to legal requirements, for example insurances.

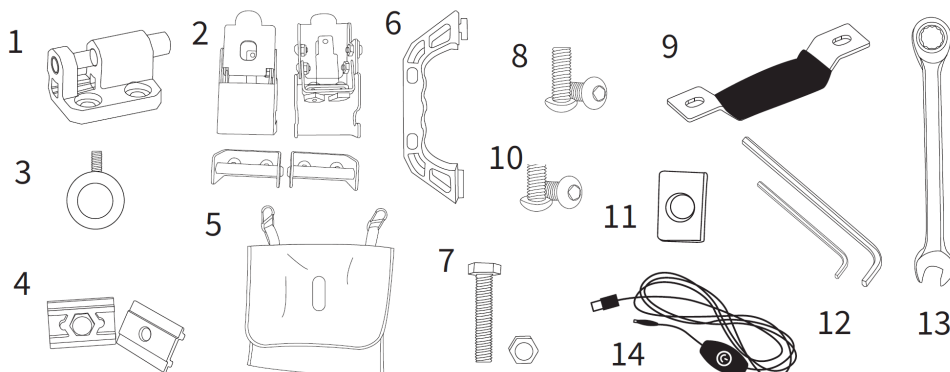


TF5545


ROOF TENT

INSTRUCTIONS

1. Put M8* (7) bolt into the aluminium slider plate (4) so that it can be located in the slots and will not come loose. Then you have A Part. Repeat this step 8 times.

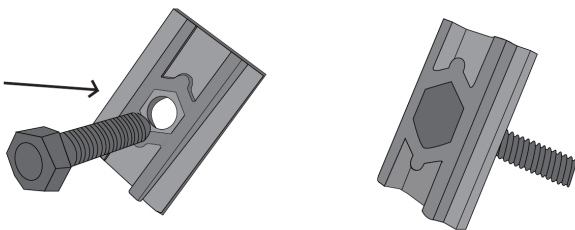


2. Attach the A Part to the steel strip and thread the nut 2-3 turns to prevent it from falling out. This gives you B Part. Each fixing bracket corresponds to one A Part. Repeat this step 8 times.

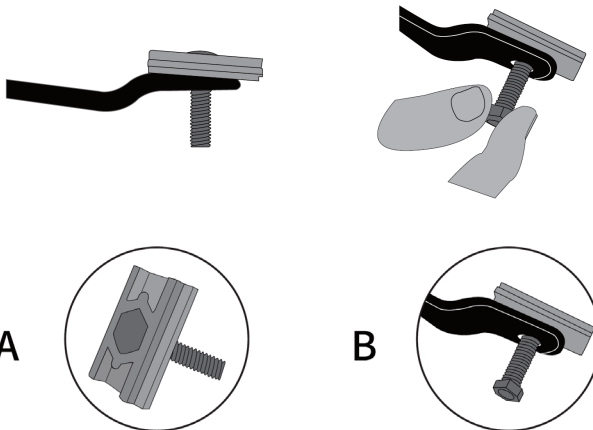

3. Make sure your tent fits your car. If you are not sure, suggested distance between crossbars is at least 140cm apart.


Make sure your car is fitted with substantial roof bars.

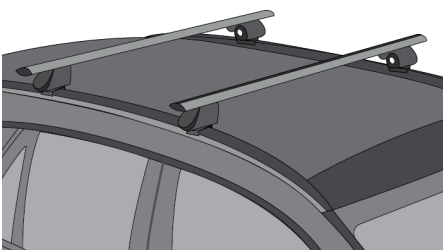


4. Move your tent to the car, and please pay attention to the correct orientation.



5. Lift up your tent.

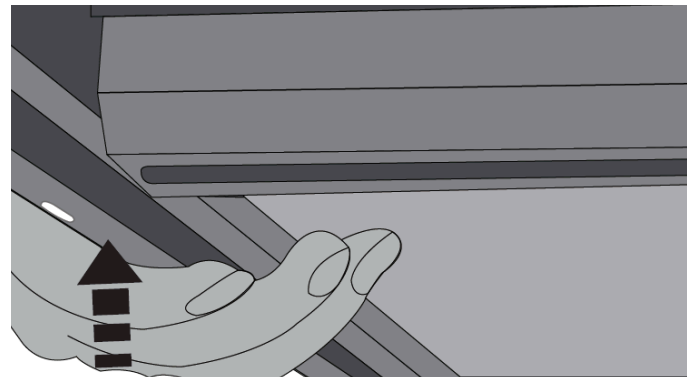


6. Put two of each B Part into both the left and right bottom rails and slide them between the two roof racks.

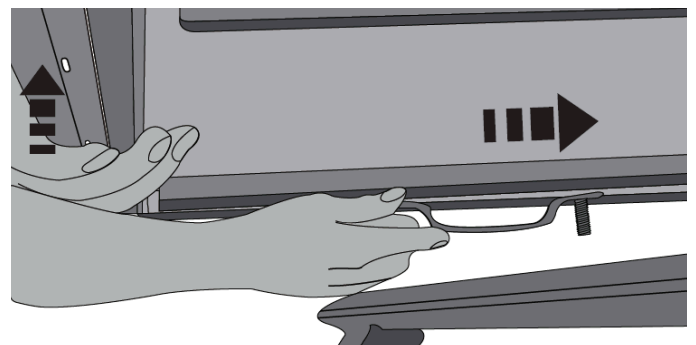


TF5545

ROOF TENT


7. Slide A Part into the left and right bottom rails from the front and back.

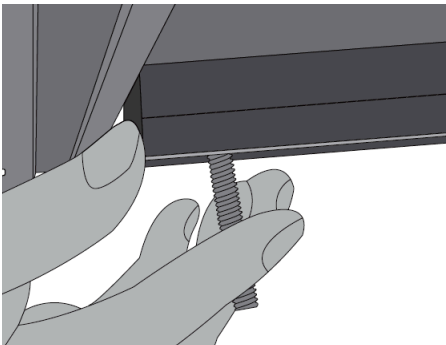



8. Attach A Part to B along the holes and screw on the nuts. Use a ratchet wrench to tighten both sides until the bottom mounting steel strip is slightly deformed.

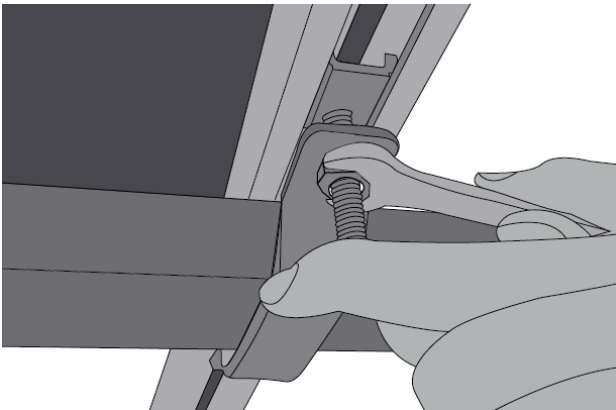


9. Undo the Velcro retaining trap of the ladder. Grab the top of the ladder and set it all the way. The ladder is telescopic.

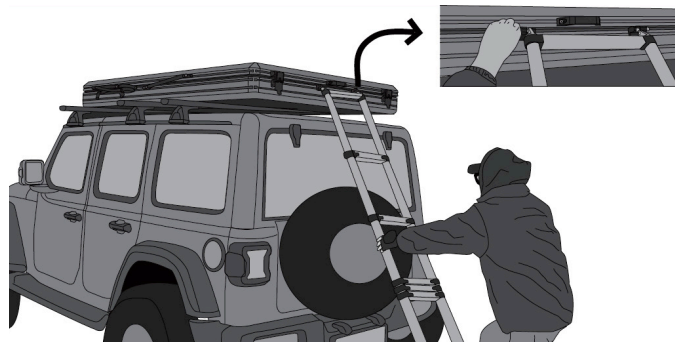

10. Slide the handle along the rail channel. Secure the handle at the mid-position. Tighten the fastening screw using a Hex key.

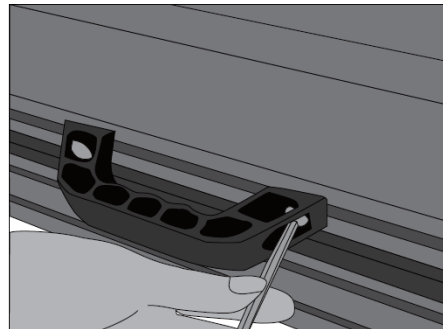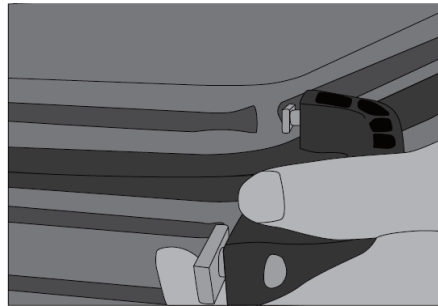

11. Relocate latches from the side position to the front position.

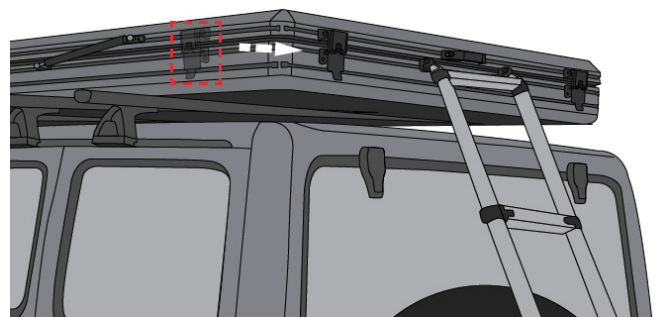


FITTING GUIDE

TerrafirMa
Serious 4x4 Accessories


TF5545

ROOF TENT


12. Release all latches on the of the tent. 2 locks at the front and 2 locks at the back.

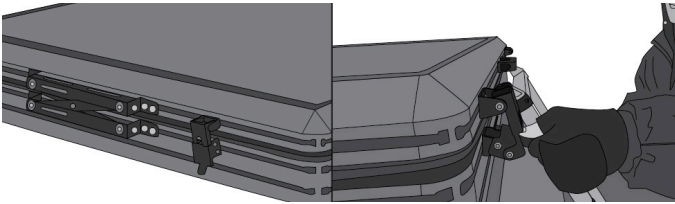

13. Push the shell of the tent upwards.

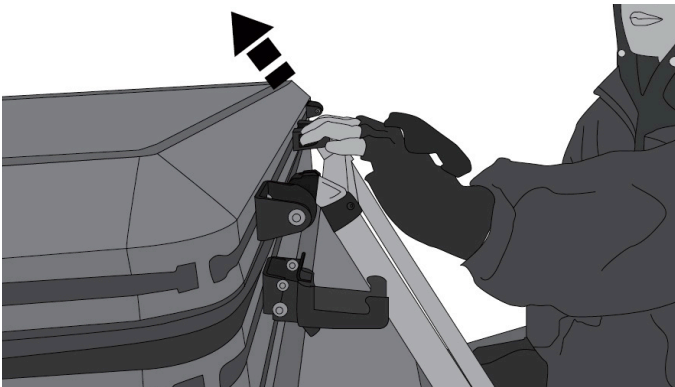


14. Pull down the elastic rope.

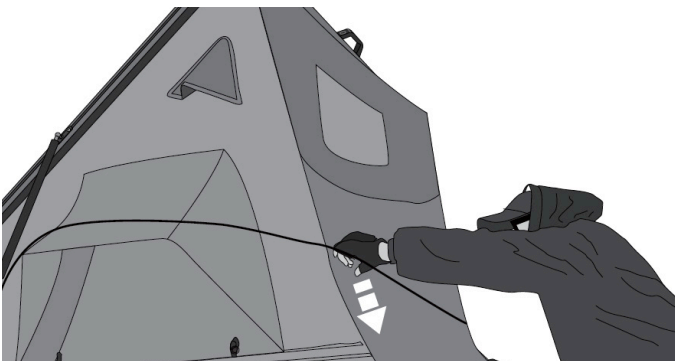


15. Lift up the internal hoop and push it out until the canvas is taut.

Take out the poles fixed on both sides.

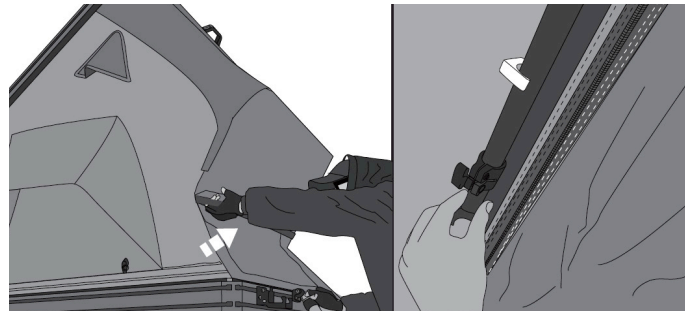

16. Unlock the telescopic rod and extend it to snap at the bend and lock it in place. Repeat on the other side.

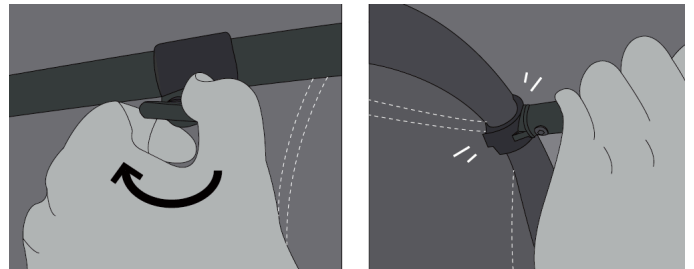

IMPORTANT

To Ensure Safety, Check All Mounting Bolts And Rails Every Two Months Or After Experiencing Rough Terrain. Realign And Tighten If Necessary.

