


**INSTALL TIME: 5 Mins**

1 SEAL YOUR VEHICLE'S ROOF

You will need:☐ **4 mm Hex Key**

If your Rack's Foot Rails have been mounted using a rivnut, well nut or plus nut and you wish to remove the Rack and Foot Rails you will need to seal the mounting holes using the Foot Rail Sealing Kit.

- (**A**) Remove the Rack and foot Rails from the vehicle, taking care to store all fasteners in a safe place for future use. Clean the area round each of the mounting points ensuring that is if free of any silicone. Place a Cover Cap over each of the mounting points and secure using a M6 Flat Washer and M6 x 16 Button Head Bolt as shown. Close Cap once secured to vehicle.

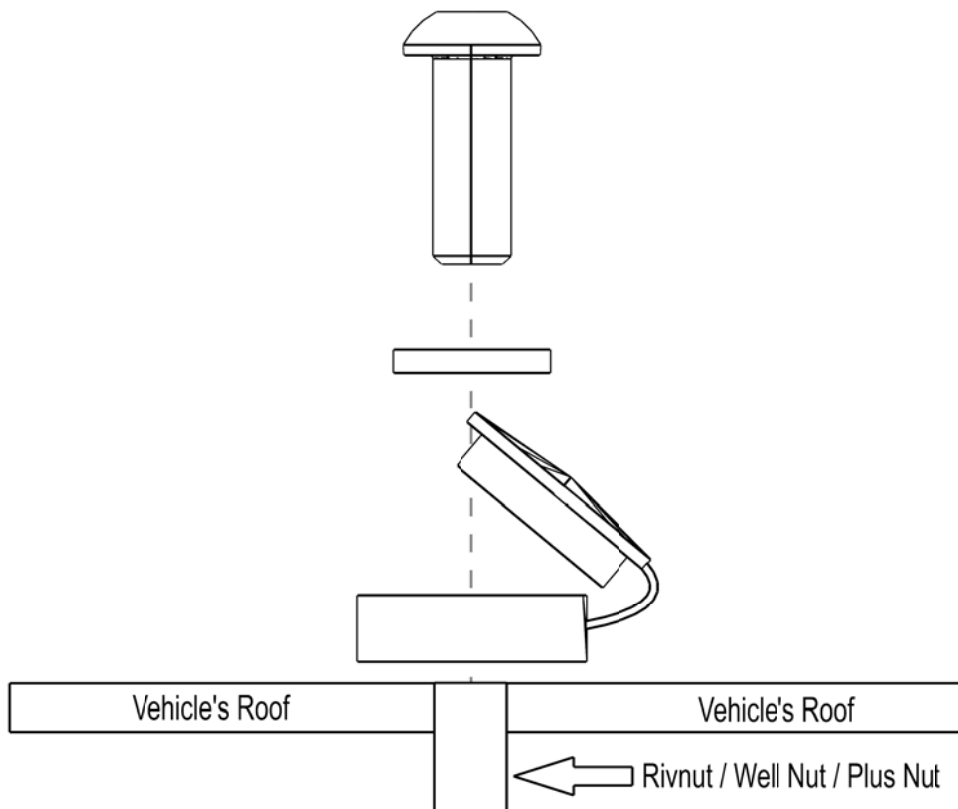

Congratulations, you have completed your installation. Take a step back and admire your work. Good Job!